

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB NO. 0704-0188

Public Reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comment regarding this burden estimates or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave Blank)		2. REPORT DATE 8/14/02	3. REPORT TYPE AND DATES COVERED FINAL
4. TITLE AND SUBTITLE Active and Reactive Shells		5. FUNDING NUMBERS DAAD19-99-1-0200 (39126-EG)	
6. AUTHOR(S) Amr M. Baz			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of Maryland Mechanical Engineering Department College Park, MD 20742		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)  U. S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211		10. SPONSORING / MONITORING AGENCY REPORT NUMBER  39126.2 - EG	
11. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.			
12 a. DISTRIBUTION / AVAILABILITY STATEMENT  Approved for public release; distribution unlimited.		12 b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  Active Shells (AS) and Reactive Shells (RS) are proposed to attenuate the undesirable wave propagation developed by various sources of external excitations. Emphasis will be placed here on excitations resulting from moving ballistic pressures that are developed during the firing of projectiles in gun barrels. The proposed shells are envisioned to be made of tubes that have passive or active sources of mechanical impedance mismatch which are placed along their longitudinal axes. These sources can be active inserts or reactive stiffeners that are tuned for optimal performance. The geometrical parameters and location of the active inserts or the reactive stiffeners will be optimally determined to maximize the attenuation of the waves as they propagate from one end of the shells to the other. Such attenuation results from the proper interaction between the incident, reflected and transmitted waves at the zones of impedance mismatch in a way similar to what happens in reactive mufflers of passenger cars. The development and the optimization of the RS model and RS will be carried out and the performance of the optimal configurations will be tested at the University of Maryland. The performance of prototypes of the successful configurations will be evaluated at the firing range of the U. S. Army Benet Laboratory in Watervliet Arsenal.			
14. SUBJECT TERMS Active Shells, Reactive Shells, Wave Propagation in shells, Impedance mismatch			
17. SECURITY CLASSIFICATION OR REPORT UNCLASSIFIED		18. SECURITY CLASSIFICATION ON THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED
		16. PRICE CODE	20. LIMITATION OF ABSTRACT  UL

20030328 450

**MASTER COPY:** PLEASE KEEP THIS "MEMORANDUM OF TRANSMITTAL" BLANK FOR REPRODUCTION PURPOSES. WHEN REPORTS ARE GENERATED UNDER THE ARO SPONSORSHIP, FORWARD A COMPLETED COPY OF THIS FORM WITH EACH REPORT SHIPMENT TO THE ARO. THIS WILL ASSURE PROPER IDENTIFICATION. NOT TO BE USED FOR INTERIM PROGRESS REPORTS; SEE PAGE 2 FOR INTERIM PROGRESS REPORT INSTRUCTIONS.

**MEMORANDUM OF TRANSMITTAL**

U.S. Army Research Office  
ATTN: AMSRL-RO-RI (Hall)  
P.O. Box 12211  
Research Triangle Park, NC 27709-2211

- |  |   |
|--|---|
| <input type="checkbox"/> Reprint (Orig + 2 copies) | <input type="checkbox"/> Technical Report (Orig + 2 copies)                 |
| <input type="checkbox"/> Manuscript (1 copy)       | <input checked="" type="checkbox"/> Final Progress Report (Orig + 2 copies) |
|  | <input type="checkbox"/> Related Materials, Abstracts, Theses (1 copy)      |

CONTRACT/GRANT NUMBER: DAAD19-99-1-0200 (39126-EG)


REPORT TITLE: Active and Reactive Shells

is forwarded for your information.

SUBMITTED FOR PUBLICATION TO (applicable only if report is manuscript):

1. M. Ruzzene and A. Baz, "Response of Active Periodic Shells to a Moving Projectile Propelled by an Inertial Pressure Wave", J. of Intelligent Materials and Structures, 2002.
2. O. Aldraihem and A. Baz, "Dynamic Stability of Stepped Beams under Moving Loads", J. of Sound & Vibration, Vol. 250, No. 5, pp. 835-848, 2002.
3. O. Aldraihem and A. Baz, "Moving Loads-Induced Intability in Stepped Tubes", accepted in J. of Vibration & Control, 2002.
4. O. Thorp, M. Ruzzene and A. Baz, "Attenuation and Localization of Wave Propagation in Rods with Periodic Shunted Piezoelectric Patches", J. of Smart Materials & Structures, Vol. 10, pp. 979-989, 2001.
5. G. Solarolli, Z. Gu, M. Ruzzene, and A. Baz, "Wave Propagation in Periodic Stiffened Shells: Spectral Finite Element Modeling and Experiments", Accepted in Journal of Vibration & Control, 2001.
6. M. Ruzzene and A. Baz, "Dynamic Stability of Periodic Shells with Moving Loads", Smart Structures & Integrated Systems, Vol. 4327, pp. 497-512, 2001.

Sincerely,

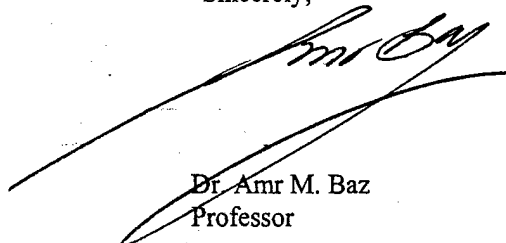

Dr. Amr M. Baz  
Professor

---

## REPORT DOCUMENTATION PAGE (SF298)

---

### ACTIVE AND REACTIVE SHELLS

(Grant # DAAD19-99-1-0200 - 39126 - EG)

**A. Baz**

Mechanical Engineering Department  
University of Maryland  
College Park, MD 20742

#### RESEARCH OBJECTIVES

This study aims primarily at demonstrating the feasibility of utilizing a new class of Active and Reactive Shells (AS/RS) in impeding the propagation of waves as they travel from one end of the shells to the other. The proposed shells are made of tubes that have optimal passive or active sources of mechanical impedance mismatch in an attempt to control the wave propagation along the shells. Such passive/active control capabilities aim ultimately at enhancing the dynamics and the critical velocities of the new generation of high-speed guns.

#### APPROACH

The approach adopted to achieve the objectives of this study involves:

- a. Development of a general purpose spectral finite element model to describe the propagation of waves in variable-impedance shells. The model will predict the response as influenced by the geometrical and physical parameters of the shell as well as the introduced active/passive sources of impedance mismatch.
- b. Development of optimum design strategies that can be used in conjunction with the finite element model, developed in (a), to enable the selection of the optimal configuration of the active/passive inserts based on rational design procedures. In this task, several design objectives will be considered to ensure a balance between the attenuation of the vibrational waves and the weight/energy of the passive/active inserts.
- c. Experimental evaluation of the effectiveness of the active/reactive shells in suppressing the transmission of vibrations generated by step and sinusoidal excitations of different frequencies.
- d. Investigation of the effectiveness of the prototypes of the active/reactive shells in suppressing the vibration during firing tests at the firing range of Benet Laboratory.
- e. Investigation of the merits and limitations of the active/reactive shells as compared to conventional plain shells.

**DISTRIBUTION STATEMENT A**  
Approved for Public Release  
Distribution Unlimited

## **SIGNIFICANCE**

The proposed concepts have numerous potential military and commercial applications. In the military field, the active and reactive shells can be utilized in manufacturing stable guns with high firing speeds. In the commercial field, drive shafts of cars and helicopters can be configured as active or reactive struts. Space platforms, large robotic manipulators and massive cranes are also among the candidate applications.

## **MANUSCRIPTS**

1. M. Ruzzene and A. Baz, "Response of Active Periodic Shells to a Moving Projectile Propelled by an Inertial Pressure Wave", J. of Intelligent Materials and Structures, 2002.
2. O. Aldraihem and A. Baz, "Dynamic Stability of Stepped Beams under Moving Loads", J. of Sound & Vibration, Vol. 250, No. 5, pp. 835-848, 2002.
3. O. Aldraihem and A. Baz, "Moving Loads-Induced Intability in Stepped Tubes", accepted in J. of Vibration & Control, 2002.
4. O. Thorp, M. Ruzzene and A. Baz, "Attenuation and Localization of Wave Propagation in Rods with Periodic Shunted Piezoelectric Patches", J. of Smart Materials & Structures, Vol. 10, pp. 979-989, 2001.
5. G. Solarolli, Z. Gu, M. Ruzzene, and A. Baz, "Wave Propagation in Periodic Stiffened Shells: Spectral Finite Element Modeling and Experiments", Accepted in Journal of Vibration & Control, 2001.
6. M. Ruzzene and A. Baz, "Dynamic Stability of Periodic Shells with Moving Loads", Smart Structures & Integrated Systems, Vol. 4327, pp. 497-512, 2001.

## **SCIENTIFIC PERSONNEL**

1 Graduate Student

and

1 PI

## **SCIENTIFIC PROGRESS & ACCOMPLISHMENTS**

The following is a summary of the accomplishments to date:




1. A finite element model is developed using 3-D elasticity equations of thin reactive shells.
2. A finite element model is developed using axi-symmetric thin reactive shells.
3. The time response of the radial and transverse deflections of shell are computed during the propagation of a pressure wave along the shell.
4. An experimental set up is under now construction to monitor the radial strains and the transverse deflection of different shell configurations due to the propagation of a pressure wave along the shell. The set up will be used to verify the predictions of the finite element models and monitor the elastic stability problems associated with high wave propagation speeds.
5. Development of dynamic stability boundaries of periodic gun barrels using wave propagation criteria.
6. Development of wavelet analysis strategies to determine the pass and stop band characteristics of gun barrels with periodic stiffeners.

## **TECHNOLOGY TRANSFER**

The developed concepts are now being considered to manufacture:

1. quiet torpedo shells with controlled wave propagation from the propeller to the torpedo nose where all the electronic sensors are located (ONR N000149910070).
2. Periodic struts for isolating the transmission of vibration of helicopter gearboxes to the airframe (Rotorcraft Center of Excellence at the University of Maryland).
3. Periodic driveshafts for isolating the transmission of vibration of tailrotor to the airframe (Rotorcraft Center of Excellence at the University of Maryland).


# DYNAMIC RESPONSE OF PLAIN SHELLS TO PROPAGATION OF PRESSURE WAVES

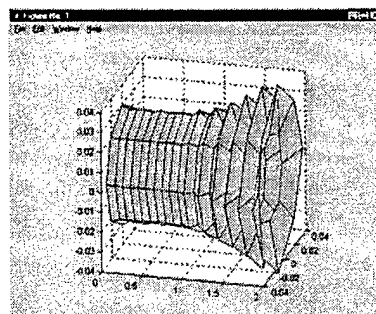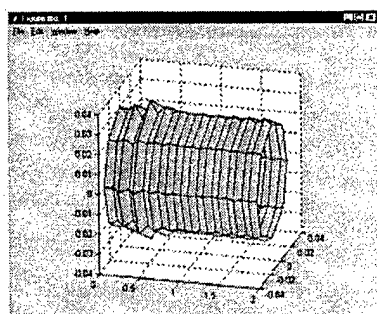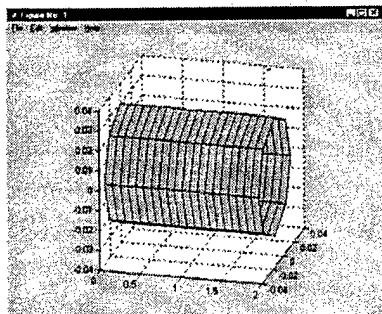


(a) – Start of wave propagation (b) – End of wave propagation

Undeformed Shell

Radial Deflection of shell

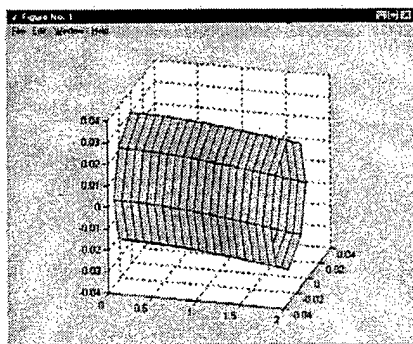


(a) – downward deflection

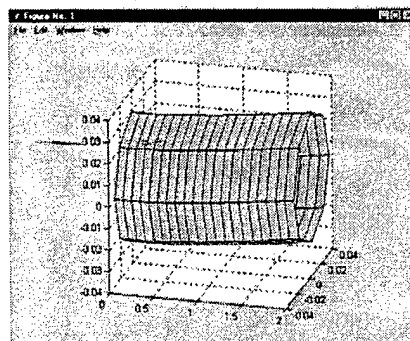

(b) – Upward deflection

Transverse Deflection Following the Release of the Pressure Wave Propagation

# STABILITY OF ACTIVELY CONTROLLED STEPPED BARREL

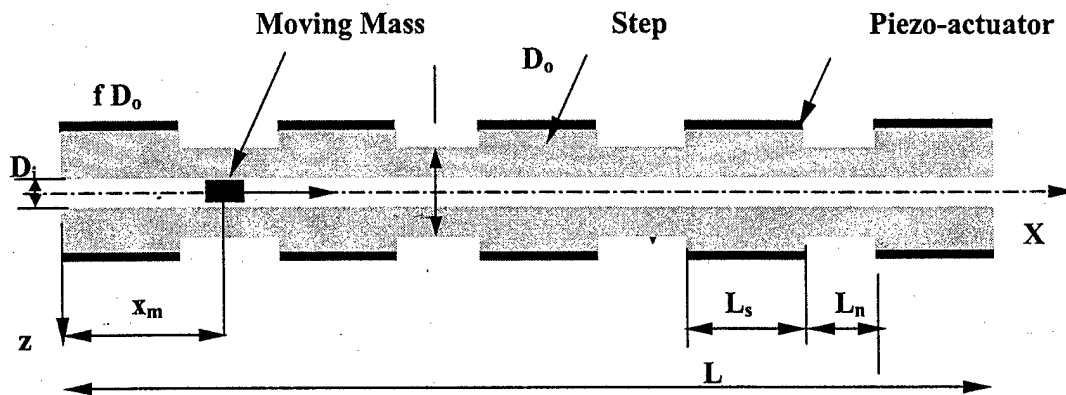


Stepped Active Barrel

## Effect of Control gain on Stability Boundaries of Barrels


$$\text{Alpha} = \frac{m_v}{\rho A L} \text{ and Beta} = \frac{V L}{2\pi} \sqrt{\frac{\rho A}{EI}}$$

where V is the travel velocity

Increasing the control gain increases maximum travel Velocity (V) before it becomes elastically unstable particularly small travelling mass ( $m_v$ ).

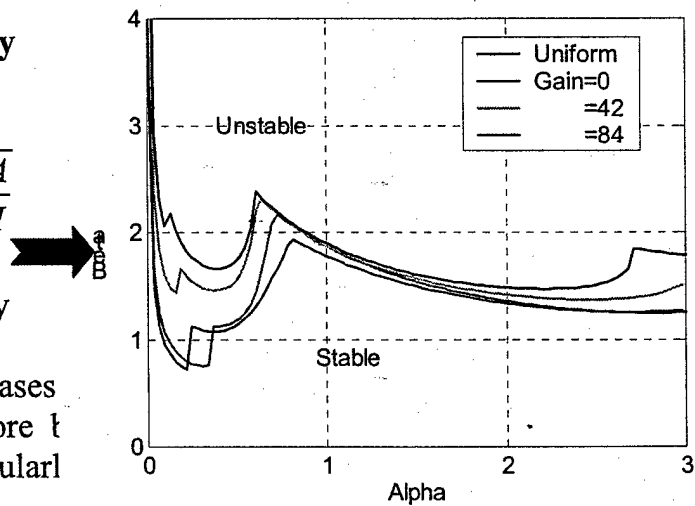


## EXPERIMENTAL SET-UP OF ACTIVELY CONTROLLED STEPPED BARREL

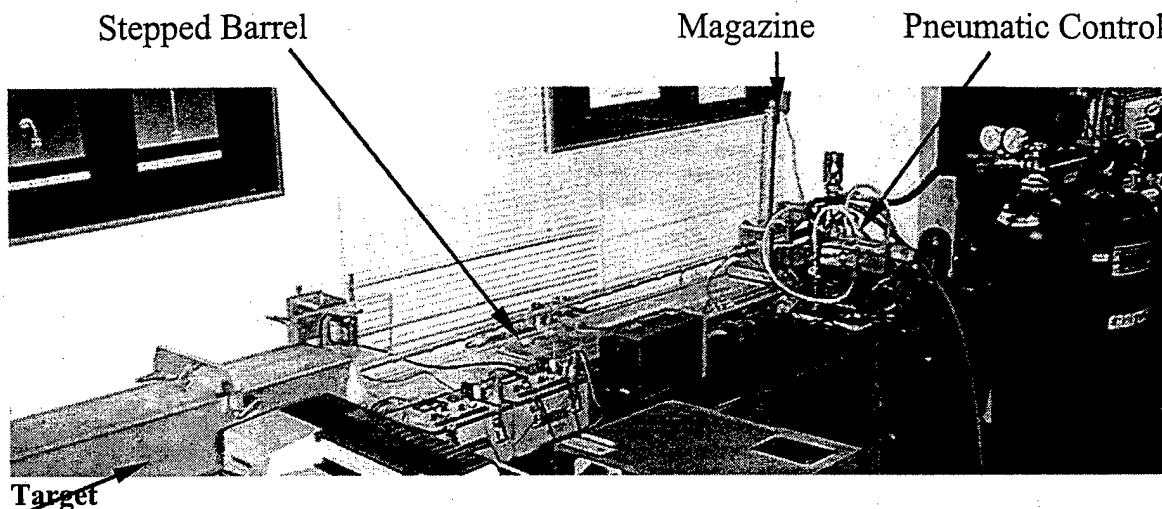


### EXPERIMENTAL RESULTS

Hoop Strain  
near tip

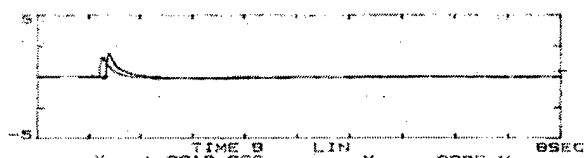


Tip Vibration

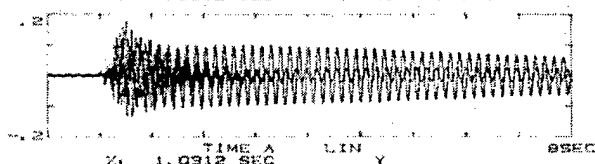


Single Mass(Black – Plain Barrel, Red – Stepped Barrel)

Hoop Strain  
near tip

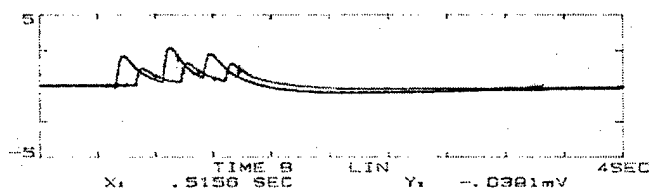

Hoop strain  
At root

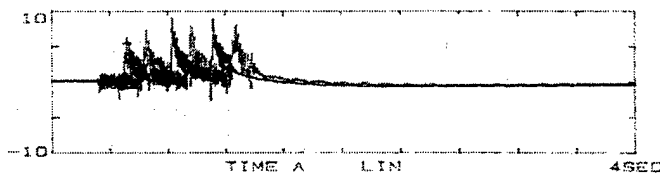


Multiple Mass(Black – Plain Barrel, Red – Stepped Barrel)



# STOP AND PASS BAND CHARACTERISTICS OF PERIODIC SHELLS

Accelerometer

Load cell

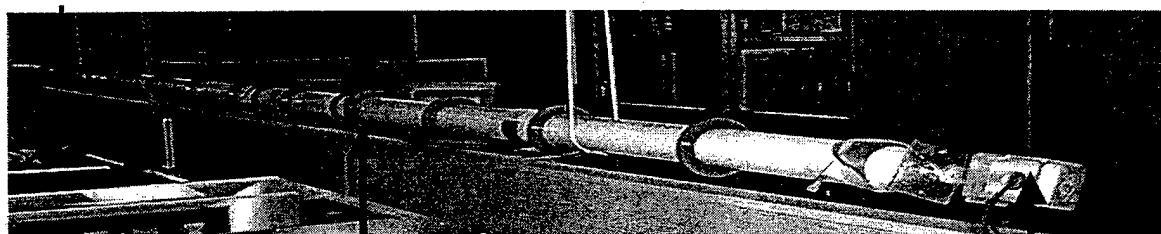

Stiffening ring




Excitation

Plain Shell




4 rings

12 rings

Impulse

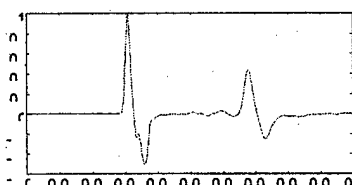

Freq.  
Hz

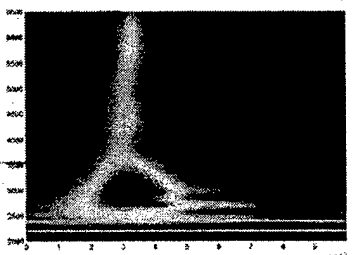

Stop  
Band

Time -s